

MODEL #: C2AL

SECTION TYPE:
TONGUE & GROOVE

STEEL BALL
BEARING ROLLER:

VINYL TOP SEAL:
 YES
 NO

TOP RAIL:
.075" WALL THICKNESS

INTERMEDIATE BOTTOM RAIL:
.075" WALL THICKNESS

REINFORCING STRUTS:
SEE TABLE#3
 NONE
 1 1/4" x 1 1/4" x 1/8" ANGLE
 2" x 2" x 1/8" ANGLE


INTERMEDIATE TOP RAIL W/ GAP & FIN:
.075" WALL THICKNESS
FIN IS .100" x 1 7/8" x FULL WIDTH

SNAP-IN GLAZING BEAD
WITH BUTYL TAPE:

AIRCRAFT CABLE:
7:1 SAFETY FACTOR

BOTTOM RAIL:
.075" WALL THICKNESS

BOTTOM ASTRAGAL:
 3 1/2" (STANDARD)
 7" (OPTIONAL)

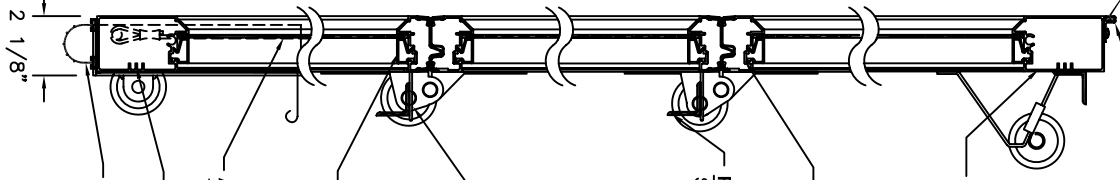

CENTER STILES:
.062" WALL THICKNESS

CENTER HINGE:
14 GA.

TOP BRACKET:
12 GA.

END STILES:
.075" WALL THICKNESS
 SINGLE END STYLE
THRU 14 1/2" WIDE
 DOUBLE END STYLE
OVER 14 1/2" WIDE


ROLLER HINGE:
14 GA. MIN.

LOCK:
 #2 END STYLE
 NONE

EXHAUST PORT:
 LEFT
 RIGHT
 CENTER
 NONE

COLOR:

WHITE
 BROWN
 CLEAR ANODIZED
 BRONZE ANODIZED
 SPECIAL (SPECIFY)

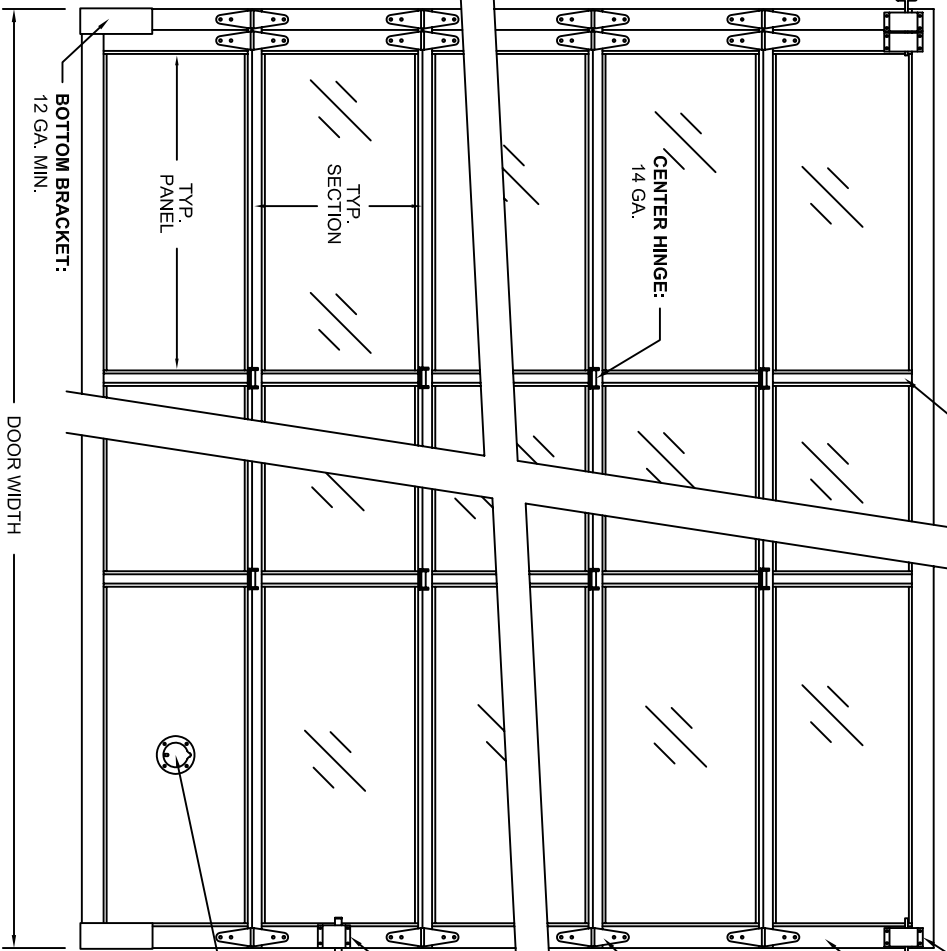

AVAILABLE SIZES:
THRU 22'-2" x 18'-0"

1/8" DSB W/ ALUMINUM
BOTTOM PANEL
 1/8" PLEXIGLASS W/
ALUMINUM BOTTOM PANEL
 1/8" TEMPERED W/
ALUMINUM BOTTOM PANEL

AVAILABLE SIZES:
THRU 20'-2" x 18'-0"

1/2" INSULATED W/
INSULATED BOTTOM PANEL *
 1/4" WIRE W/ ALUMINUM
BOTTOM PANEL
 1/4" TEMPERED W/ ALUMINUM
BOTTOM PANEL

NOTE: ALUMINUM BOTTOM PANEL
IS .050" SMOOTH ALUMINUM

* DOORS WITH INSULATED GLASS USE TWO
ALUMINUM PANELS ON BOTTOM SECTION
SANDWICHED AROUND 5/16" THICK FOAM



CUST: _____
JOB: _____
ARCH: _____
CONT: _____

MODEL #: C2AL
DOOR WIDTH: _____
DOOR HEIGHT: _____

QTY: _____
OF SECTIONS HIGH
(SEE TABLE #1)
OF PANELS WIDE
(SEE TABLE #2)

SHEET M-26
DATE: _____
BID #: _____
PAGE _____ of _____