

MODEL #: C7X17 C7X18

SECTION TYPE: TONGUE & GROOVE

STEEL BALL BEARING ROLLER:

VINYL TOP SEAL
 YES (OPTION)
 NO

FOAM TAPE THERMAL BREAK:
 POLYURETHANE INSULATION:
 R=15.05; U=.066

END STILES: (PRE-PAINTED)
 18 GA. SINGLE END STILES (THRU 142" WIDE)
 16 GA. DOUBLE END STILES (OVER 142" WIDE)



SKIN MATERIAL:
 27 GA. PRE-PAINTED EXTERIOR MINOR RIBS (C7X17)
 27 GA. PRE-PAINTED EXTERIOR FLUSH (C7X18)
 27 GA. PRE-PAINTED WHITE INTERIOR

REINFORCING STRUTS:
 SEE TABLE #4 FOR REINFORCEMENT
 NONE
 2 1/4" STRUT
 3" STRUT
 4" C-CHANNEL

AIRCRAFT CABLE:
 7:1 SAFETY FACTOR
 BOTTOM ASTRAGAL:
 3 1/2" (STANDARD)
 7" (OPTIONAL)

FULL-VISION SECTIONS:
 THRU 202" WIDE
 1/8" DSB
 1/8" PLEXIGLASS
 1/8" TEMPERED
 1/4" POLYCARBONATE
 1/4" TEMPERED
 1/4" WIRE
 1/2" INSULATED

NOTE: FULL-VISION SECTION AVAILABLE FOR ALL SECTIONS EXCEPT BOTTOM

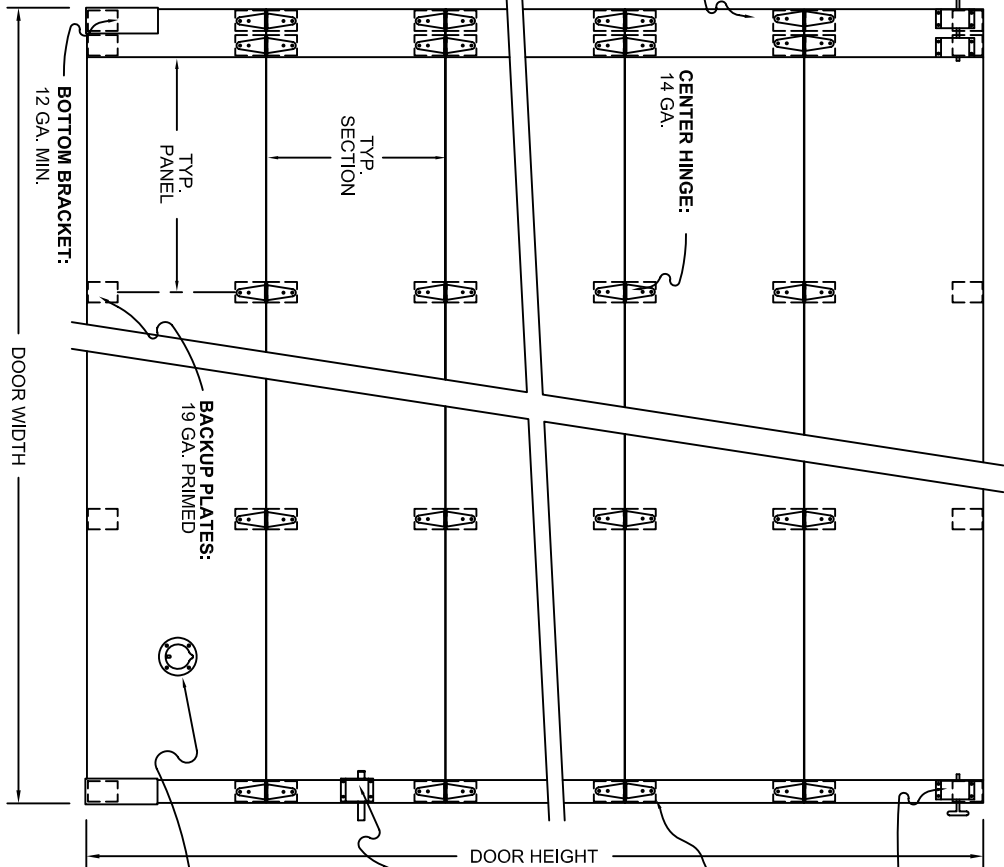

TOP BRACKET: 12 GA.

ROLLER HINGE: 14 GA. MIN.

EXTERIOR COLOR:
 WHITE
 BROWN
 TRINAR WHITE
 TAN
 GRAY

LOCK:
 #2 END STYLE
 #7 CYLINDER LOCK - NOT AVAILABLE IN FULL-VISION SECTION
 NONE

EXHAUST PORT:
 LEFT
 RIGHT
 CENTER
 NONE

GLAZING:
 SOLID - NO GLAZING
 1/4" WIRE
 1/2" INSULATED
 1/2" INSULATED TEMPERED

WINDOW SIZE AVAILABILITY:
 SEE TABLE #3
 24" x 8"
 24" x 12"

WINDOW FRAME CONSIST OF AN EXTERIOR FRAME AND AN INTERIOR RETAINER, MADE OF RIGID PVC EXTRUSIONS



CUST: _____ MODEL #: _____ QTY: _____

JOB: _____ DOOR WIDTH: _____

ARCH: _____ DOOR HEIGHT: _____

CONT: _____

OF SECTIONS HIGH (SEE TABLE #1)

OF PANELS WIDE (SEE TABLE #2)

SECTIONS TO GLAZE:

PANELS TO GLAZE:

SHEET 'M-28'

DATE: _____

BID #: _____

PAGE _____ of _____